



Lithium Coin Cell - CR 1225

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant Pb free



REACH compliant





Conflict mineral free

Technical Data Sheet - CR 1225

SPECIFICATIONS		DIMENSIONS (mm)	
Nominal Voltage	3V		
Gigatek part number	CR 1225		
Nominal Capacity	48 mAh		
Standard Load	68 kΩ		
Standard Current	0.1 mA		
Max. Pulse Current	5 mA		
Operating Temperature	-30°C to +85°C*		
Weight	Approx. 0.87g		
Chemistry	Li/MnO ₂		
UI1642	MH62838		

* In applications where the battery is exposed to temperatures >60°C, please contact Gigatek

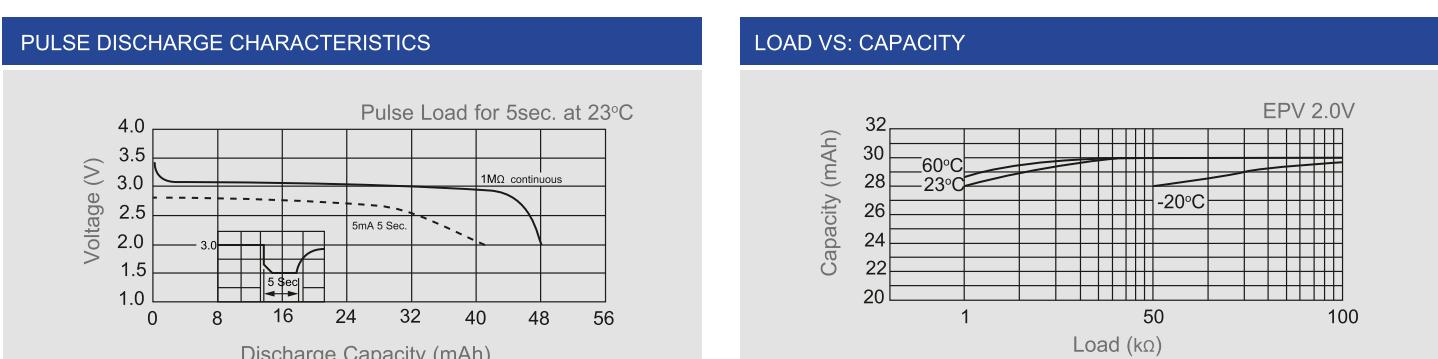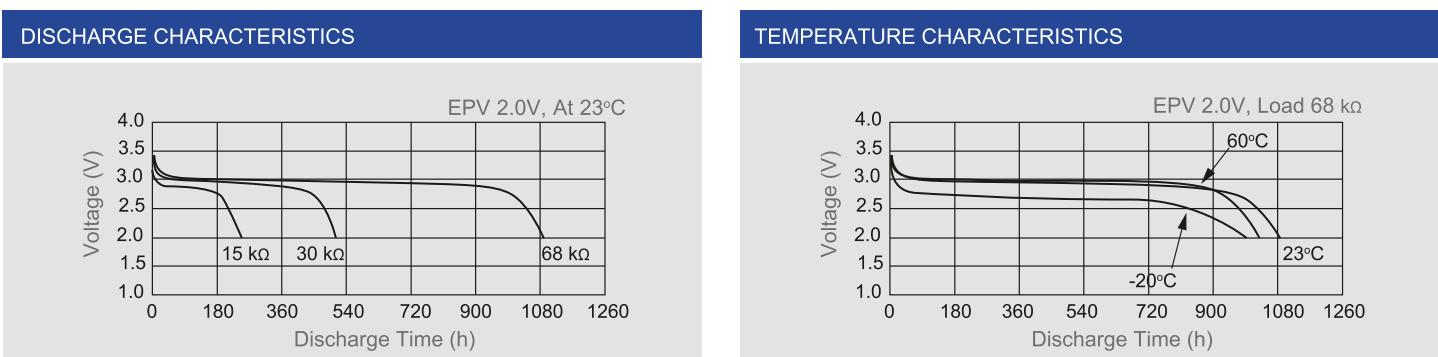

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Gigatek for more information