

Lithium Coin Cell - CR 1225

-Reliable energy for your application
-Standard cells and customized packs
-ESD protection
-UL recognized
-Battery Certification Experts

RoHS 2011/65/EC — RoHS compliant
Pb free
REACH compliant
Conflict mineral free


Techincal Data Sheet - CR 1225

SPECIFICATIONS


Nominal Voltage	3V
Gigatek part number	CR 1225
Nominal Capacity	48 mAh
Standard Load	68 kΩ
Standard Current	0.1 mA
Max. Pulse Current	5 mA
Operating Temperature	-30°C to +85°C*
Weight	Approx. 0.87g
Chemistry	Li/MnO_2
UI1642	MH62838

* In applications where the battery is exposed to temperatures >60°C, please contact Gigatek


DIMENSIONS (mm)

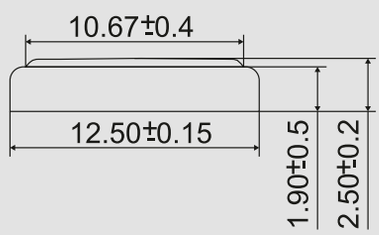


DISCHARGE CHARACTERISTICS

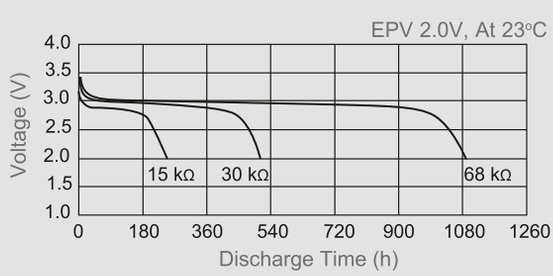


TEMPERATURE CHARACTERISTICS

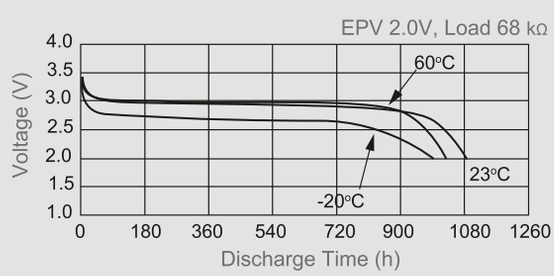

PULSE DISCHARGE CHARACTERISTICS

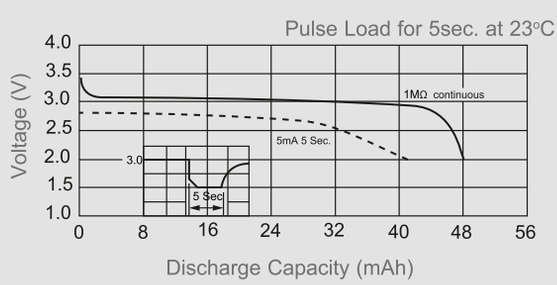

LOAD VS: CAPACITY

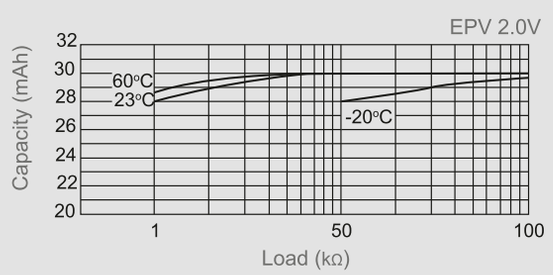

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Gigatek for more information

Giga-tek BATTERIES
கிகாடெக் பேட்டரி | गीगाटेक बैटरी

14-01-2026

Gigatek Batteries Pvt. Ltd.,
E-mail : customercare@gigatekbatteries.com
www.gigatekbatteries.com

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact **Gigatek** for the latest information.