

Lithium Coin Cell - CR 2032 V3

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available

RoHS compliant · Pb free · REACH compliant · Conflict mineral free


Technical Data Sheet · CR 2032 V3

SPECIFICATIONS

Gigatek part number	CR2032 V3
Nominal Voltage	3V
Nominal Capacity	220 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Continuous Current	3 mA
Max. Pulse Current	15 mA
Operating Temperature	-30°C to +85°C *
Weight	Approx. 2.9 g
Chemistry	Li/MnO_2


Note: Capacity 240mAh is obtained at standard cc load to 2.0V at 23°C.

DIMENSIONS [mm]

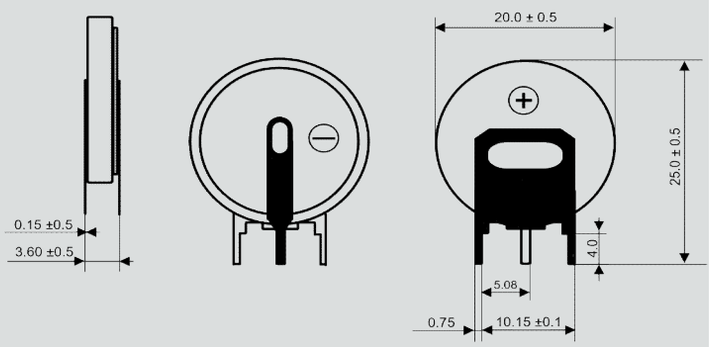


* In applications where the battery is exposed to temperatures >60°C, please contact Gigatek.


DISCHARGE CHARACTERISTICS

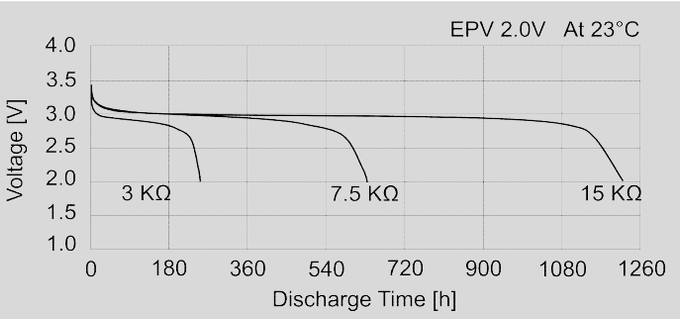


TEMPERATURE CHARACTERISTICS

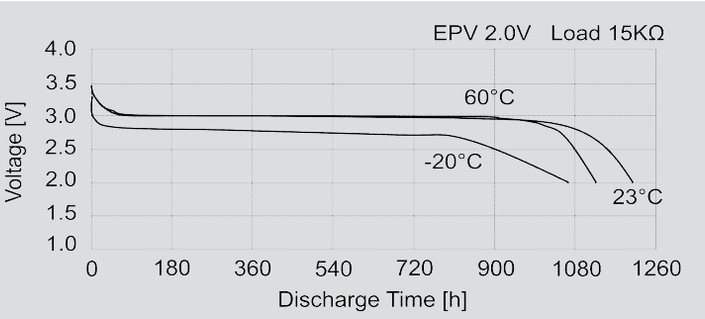

DISCHARGE CHARACTERISTICS

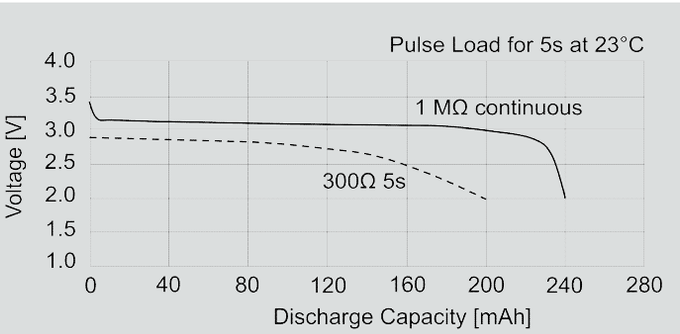

LOAD VS: CAPACITY

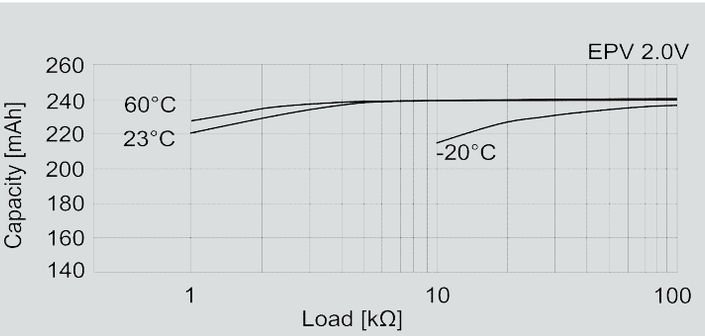

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Gigatek for more information

Giga-tek BATTERIES
கிகாடெக் பேட்டரி | गीगाटेक बैटरी

Gigatek Batteries Pvt. Ltd.,
E-mail : customercare@gigatekbatteries.com
www.gigatekbatteries.com

14-01-2026

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact **Gigatek** for the latest information.