

Lithium Coin Cell - CR2450 V3

-Reliable energy for your application
-Standard cells and customized packs
-ESD protection
-UL recognized
-Battery Certification Experts


RoHS compliant
Pb free
REACH compliant
Conflict mineral free

Technical Data Sheet · CR 2450 V3

Nominal Voltage	3V
Gigatek part number	CR2450 V3
Nominal Capacity	610 mAh
Standard Load	7.5 kΩ
Standard Current	0.4 mA
Max. Continuous Current	4 mA
Max. Pulse Current	15 mA
Operating Temperature	-30°C to +85°C*
Weight	Approx. 6.2 gr.
Chemistry	Li/MnO_2
UL1642	MH62838


Note: Capacity 610mAh is obtained at standard cc load to 2.0V at 23

DIMENSIONS (mm)

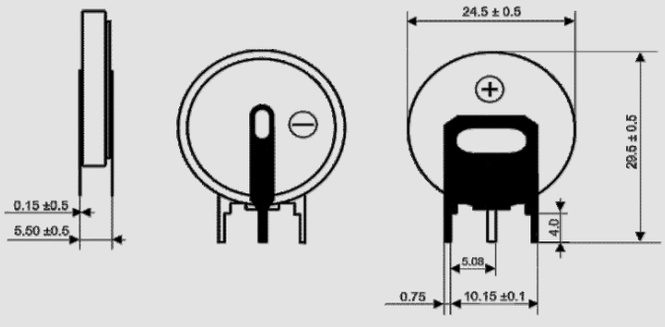


* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DISCHARGE CHARACTERISTICS

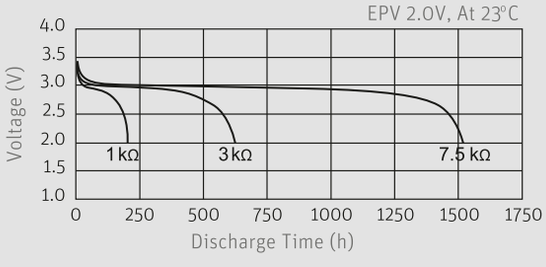


TEMPERATURE CHARACTERISTICS

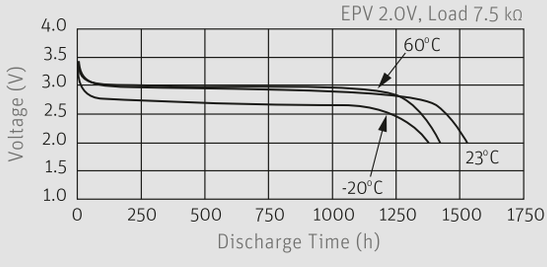

PULSE DISCHARGE CHARACTERISTICS

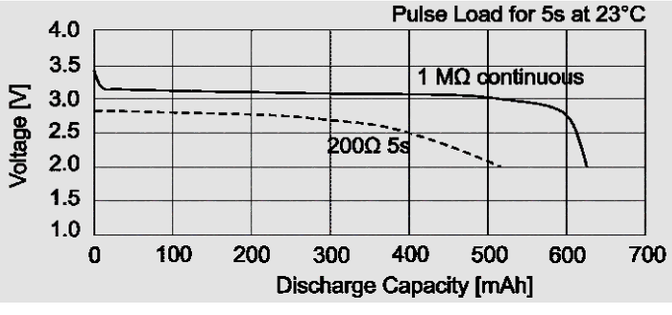

LOAD VS: CAPACITY

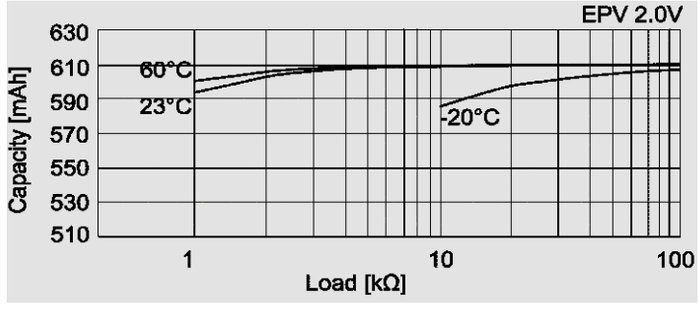

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Gigatek for more information

Giga-tek BATTERIES
கிகாடெக் பேட்டரி | गीगाटेक बैटरी

Gigatek Batteries Pvt. Ltd.,
E-mail : customercare@gigatekbatteries.com
www.gigatekbatteries.com

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact **Gigatek** for the latest information.

14-01-2026